

VT7DSW - B42 - X L 00 - A 1 W1 - **

Series

Camring

Volumetric displacement cm^3/rev (in^3/rev)

B14 = 43.9 (2.68)	B31 = 99.1 (6.05)
B17 = 55.0 (3.36)	B35 = 113.4 (6.92)
B20 = 66.0 (4.03)	B38 = 120.6 (7.36)
B22 = 70.3 (4.29)	B42 = 137.5 (8.39)
B24 = 81.1 (4.95)	045 = 145.7 (8.89)
B28 = 89.9 (5.49)	050 = 157.9 (9.64)

Type of shaft VT7DS

- X - keyed (SAE C)
- 3 - Splined (SAE C)

Direction of rotation (view on shaft end)

- R - clockwise
- L - counter-clockwise

Modifications

IM 1115- Housing and mounting flange fluid connections are in the same plane

Mounting w/connection variables

4 bolts SAE flange J518

P = 1-1/4"	S = 2 1/2"
UNC	METRIC
VT7DSW	W1 M1

1) 250 bar (3630 psi) max. int.


Seal class

- 1 - S1 (for mineral oil)
- 4 - S4 (for fire resistant fluids)
- 5 - S5 (for mineral oil and fire resistant fluids)

Design letter


Porting combination

00 - standard




S - Suction port P - Pressure port


INTERNAL LEAKAGE (TYPICAL)

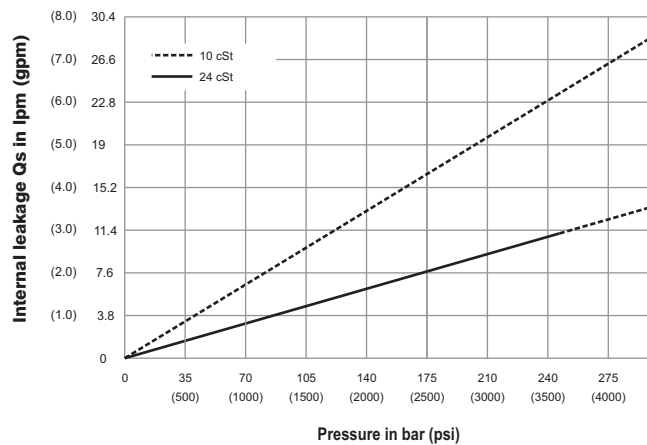


NOISE LEVEL (TYPICAL) VT7DSW- B31

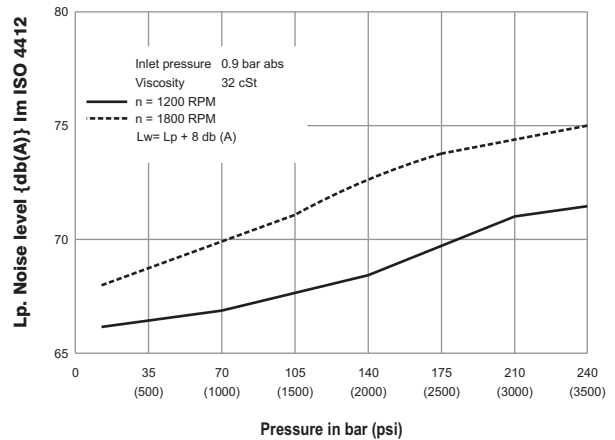

HYDROMECHANICAL POWER LOSS (TYPICAL)

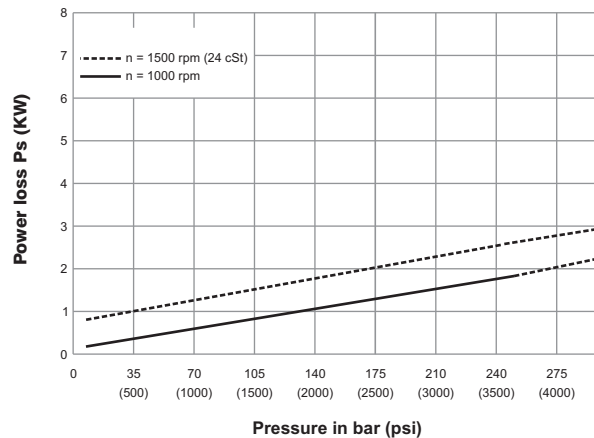


PERMISSIBLE RADIAL LOAD

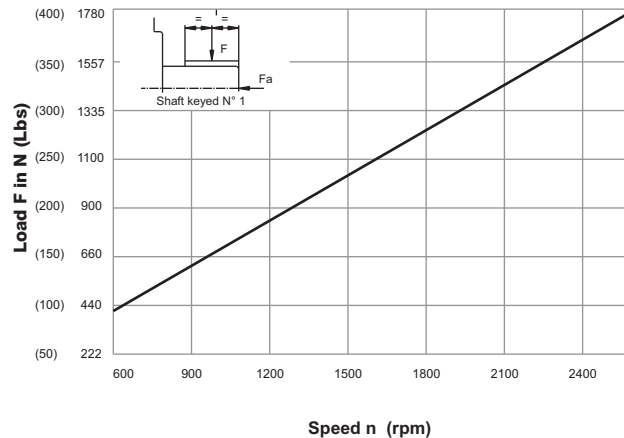

Maximum axial load permissible $F_a = 1200 \text{ N}$ (270 Lbs)

Note: Product details are liable to change without any notice

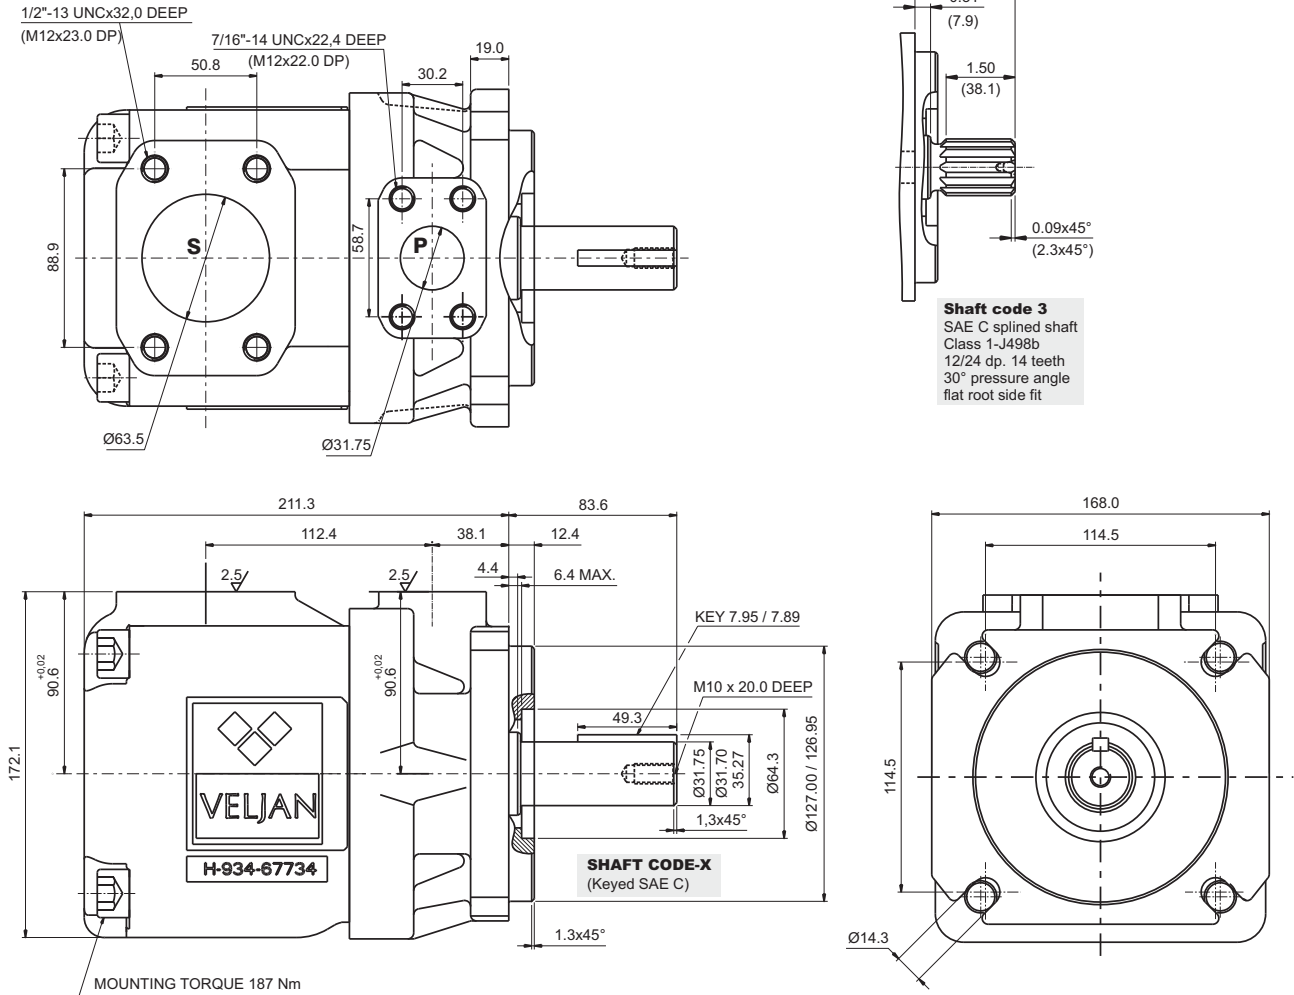

VP
SP

OPERATING CHARACTERISTICS - TYPICAL (24 cST)

Pressure port	Series	Volumetric Displacement Vp		Flow q & n = 1500 rpm						Input power p & n = 1500 rpm					
				p = 0 bar (0 psi)		p = 140 bar (2000 psi)		p = 300 bar (4350 psi)		p = 7 bar (100 psi)		p = 140 bar (2000 psi)		p = 300 bar (4350 psi)	
		in³/rev	cm³/rev	gpm	lpm	gpm	lpm	gpm	lpm	hp	kw	hp	kw	hp	kw
VT7DSW	B14	2.68	43.9	17.43	65.8	15.98	60.7	14.32	54.1	2.88	2.1	23.14	17.2	48.73	36.3
	B17	3.36	55.0	21.79	82.3	20.34	76.8	18.68	70.6	3.14	2.3	28.23	21.0	59.93	44.6
	B20	4.03	66.0	26.15	98.8	24.69	93.3	23.04	87.0	3.39	2.5	33.31	24.8	71.12	53.0
	B22	4.29	70.3	27.85	105.2	26.40	99.7	24.74	93.5	3.49	2.6	35.30	26.3	75.49	56.3
	B24	4.95	81.1	32.14	121.4	30.68	115.9	29.02	109.6	3.74	2.7	40.29	30.0	86.47	64.4
	B28	5.49	89.9	35.66	134.7	34.21	129.3	32.54	123.0	3.94	2.9	44.41	33.1	95.53	71.2
	B31	6.05	99.1	39.31	148.5	37.85	143.0	36.19	136.7	4.15	3.1	48.67	36.3	104.89	78.2
	B35	6.92	113.4	44.93	169.8	43.48	164.3	42.03 ¹⁾	158.8 ¹⁾	4.49	3.3	55.23	41.1	108.65 ¹⁾	81.0 ¹⁾
	B38	7.36	120.6	47.78	180.6	46.33	175.1	44.88 ¹⁾	169.6 ¹⁾	4.65	3.4	58.56	43.6	115.31 ¹⁾	85.9 ¹⁾
	B42	8.39	137.5	54.48	205.9	53.03	200.4	51.78 ³⁾	195.7 ²⁾	5.04	3.7	66.38	49.4	124.48 ²⁾	92.8 ²⁾
	045	8.89	145.7	57.73	218.2	55.92	211.3	54.55 ³⁾	206.1 ³⁾	5.61	4.1	69.78	52.0	120.33 ³⁾	89.7 ³⁾
	050	9.64	157.9	62.61	236.6	60.79	229.7	59.81 ⁴⁾	226.0 ⁴⁾	5.89	4.4	75.48	56.2	112.11 ⁴⁾	83.6 ⁴⁾

1) B35-B38 = 280 bar (4060 psi) max. int. 2) B42 = 260 bar (3770 psi) max. int. 3) 045 = 240 bar (3500 psi) max. int. 4) 050 = 210 bar (3000 psi) max. int.
*special 2 1/2 (2.5 dia) suction also available - Please contact VELJAN