


Veljan flange model Check Valve Series VC5V are direct operated poppet type and are suitable for mounting directly on the delivery port of Veljan vane pumps or any SAE 61 port. These valves can be used in conjunction with Veljan VR5V pressure control valves in stack formation. VC5V check valves are matched to the flow capabilities of Veljan range of vane pumps and are available for pressures up to 3000 psi (210 bar) and flow up to 263 gpm (1000 lpm)

VC5V Check Valves used as stack with VR5U unloader valve have an additional port X for pilot action of VR5U. The valves are zero - leak for flow from port B to port A and free flow in the opposite direction.




SPECIFICATIONS

General




Type	: Check valve
Design	: Poppet type
Mounting	: Flanged (mounted on valves series VR5)
Mounting position	: Optional
Port sizes (nominal)	: 3/4", 1", 1 1/4", 1 1/2", 2
Direction of flow	: A → B
Ambient temperature	: -20° C...+60° C (-4° F...+140° F)
Special working conditions	: Consult VELJAN

Hydraulics

Operating Pressure range	: Minimum 0 psi (0 bar) Maximum 3000 psi (210 bar)
Cracking pressure	: 4.5 psi (0.3 bar)
Maximum flow gpm (lpm)	
VC5V 06 (3/4")	: 26 (100)
VC5V 08 (1")	: 53 (200)
VC5V 10 (1 1/4")	: 105 (400)
VC5V 12 (1 1/2")	: 198 (750)
VC5V 16 (2")	: 263 (1000)
Nominal flow gpm (lpm)	: depends on pump delivery
Fluid	: Mineral oil as per DIN 51524/25 or other fluids on request
Fluid Temperature Range	: -18° C...+80° C (0° F...+176° F)
Viscosity recommended	: 10 to 650 cSt (60 to 3900 SSU)

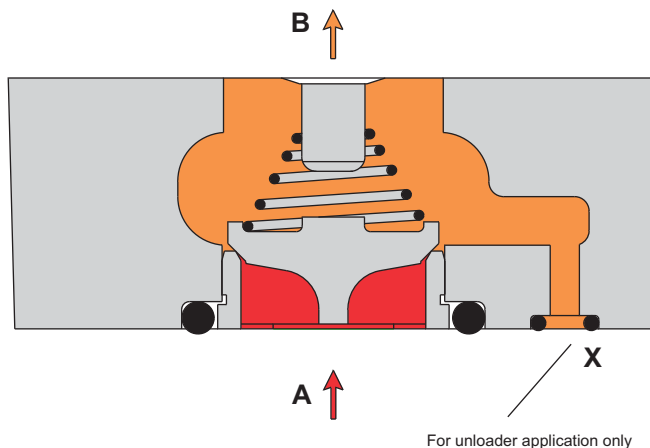


Typical application

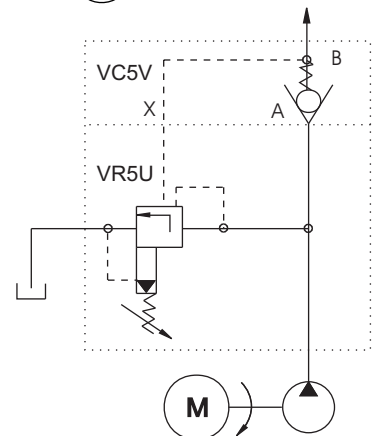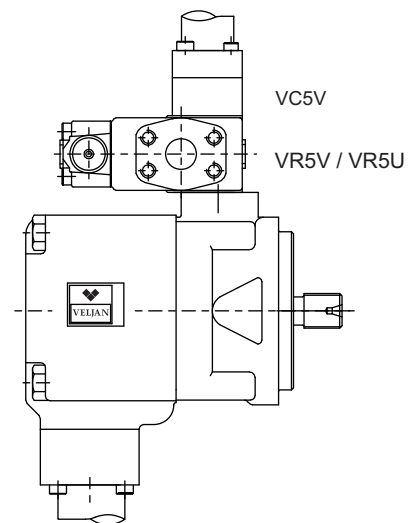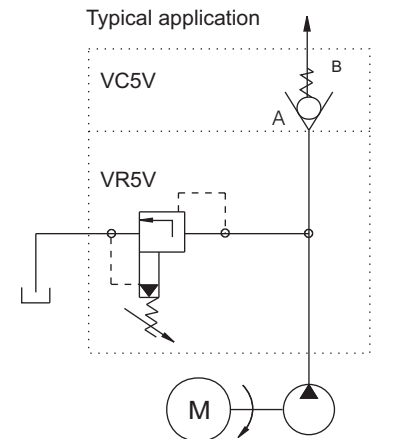

ORDERING CODE

Series	VC5V	08	-	3	1	1	-	A	1	Seal class
Size	06 - 3/4"	08 - 1"	10 - 1 1/4"	12 - 1 1/2"	16 - 2"					1 - Standard
Maximum pressure	3 - 3000 psi (210 bar) (VC5V06/08/10/12/16 - S.A.E. 61)	6 - 3000 psi (210 bar) (VC5V12 - S.A.E. 62)								5 - Viton (for special fluids consult VELJAN)
Body	1 - with face seal, 2 - with face seal (for unloader application), 3 - without face seal									Design letter
										Spring
										1- Standard

Installation

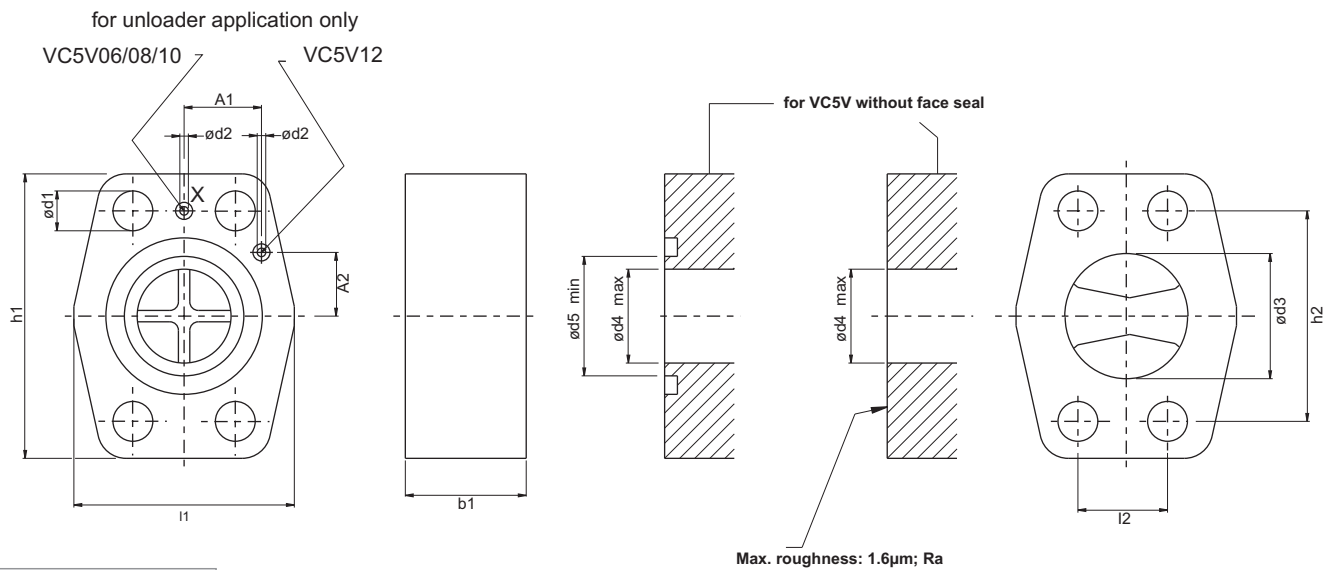

	Dimensions	
	in	mm
A1	1.071	27.2
A2	0.88	22.4






Dimensions

	Size		I1	I2	h1	h2	b1	ød1	ød2	ød3	ød4 max	ød5 min	Weight
VC5V06	3/4"	in	2.047	0.874	2.638	1.874	1.0	0.413	0.12	0.906	0.748	0.906	1.1 lbs
		mm	52.0	22.2	67.0	47.6	25.4	10.5	3.0	23.0	19.0	23.0	0.5 kg
VC5V08	1"	in	2.283	1.032	2.834	2.063	1.209	0.413	0.12	1.26	0.984	1.181	1.34 lbs
		mm	58.0	26.2	72.0	52.4	30.7	10.5	3.0	32.0	25.0	30.0	0.6 kg
VC5V10	1 1/4"	in	2.866	1.189	3.142	2.311	1.378	0.472	0.12	1.378	1.26	1.378	2.2 lbs
		mm	72.8	30.2	79.8	58.7	35.0	12.0	3.0	35.0	32.0	35.0	1.0 kg
VC5V12	1 1/2"	S.A.E.61	2.953	1.401	4.346	2.748	1.398	0.531	0.12	1.772	1.693	1.713	3.37 lbs
				35.7		69.8		13.5					
		S.A.E.62	75.0	1.437	110.4	3.126	35.5	0.669	3.0	45.0	43.0	43.5	1.5 kg
				36.5		79.4		17.0					
VC5V16	2"	in	2.834	1.685	4.409	3.063	1.398	0.531	-----	1.772	2.086	2.066	3.37 lbs
		mm	72.0	42.8	112.0	77.8	35.5	13.5	-----	45.0	53.0	52.5	1.5 kg

Δp - q_v - Characteristics

(Fluid 60 cSt at 40° C

Test temp. 50° C 10%)

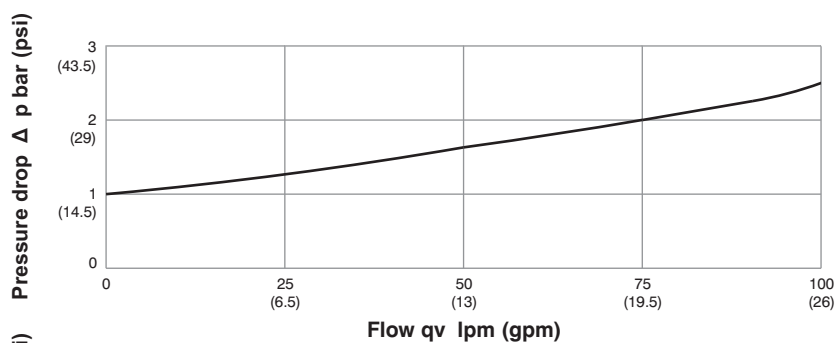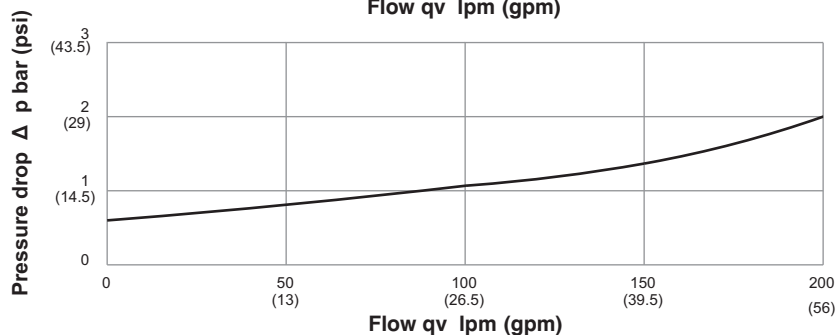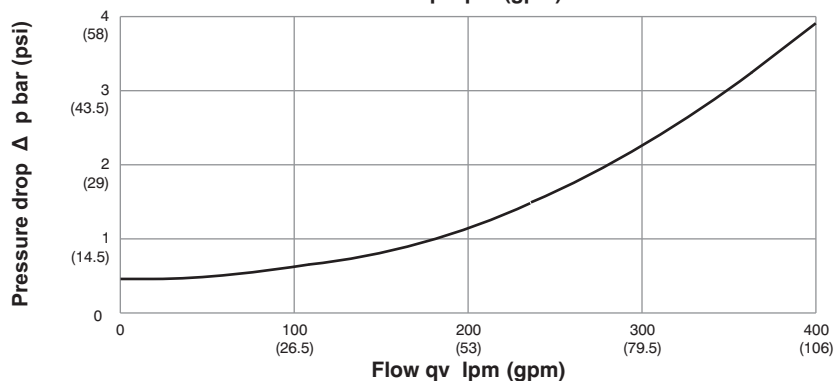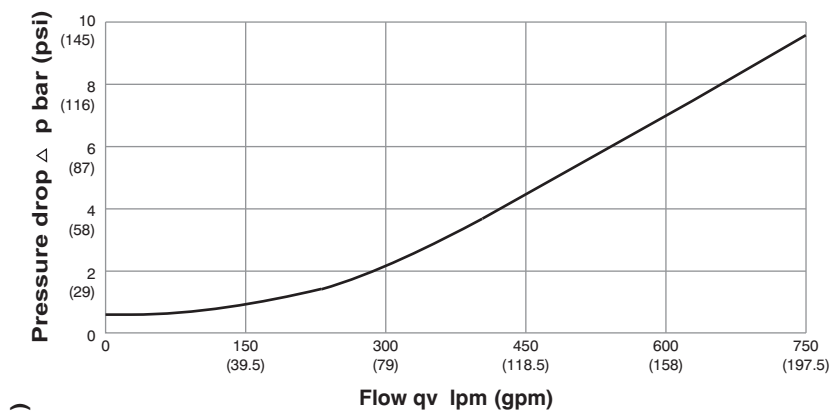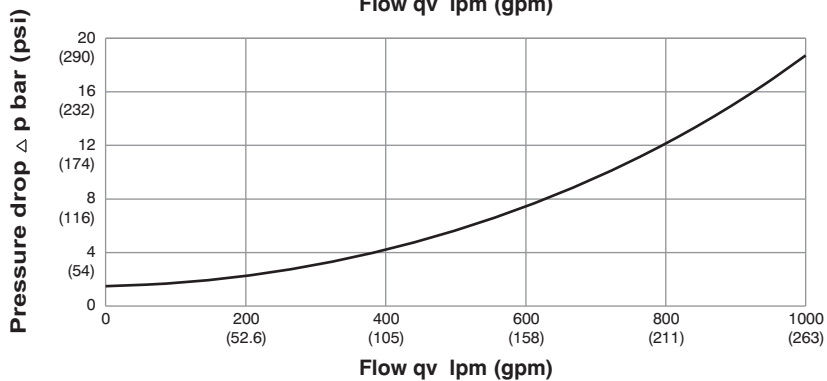VC5V06**VC5V08****VC5V10****VC5V12****VC5V16**

CV